

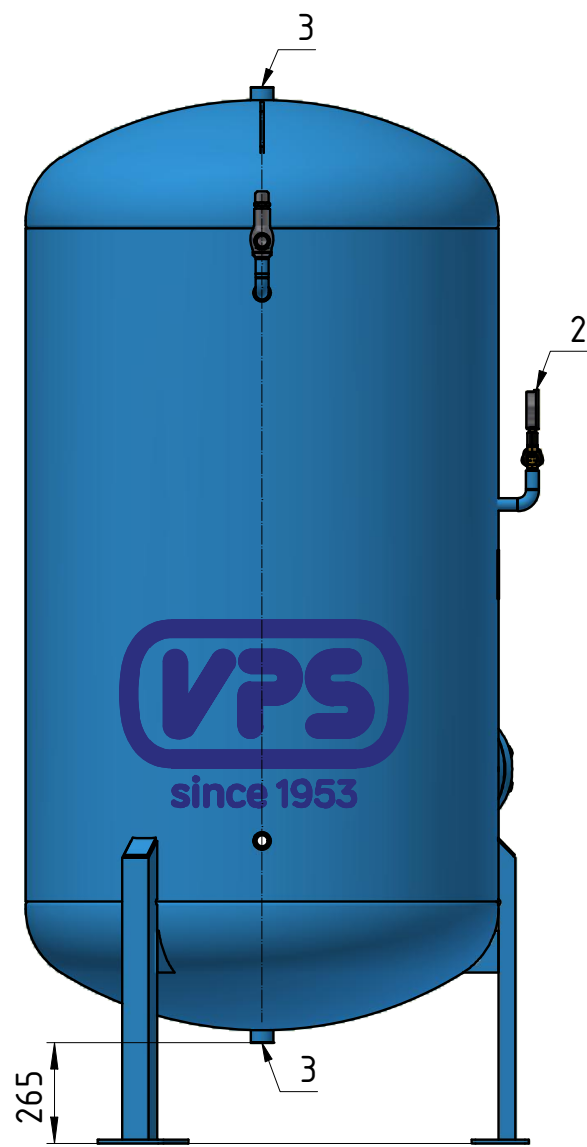
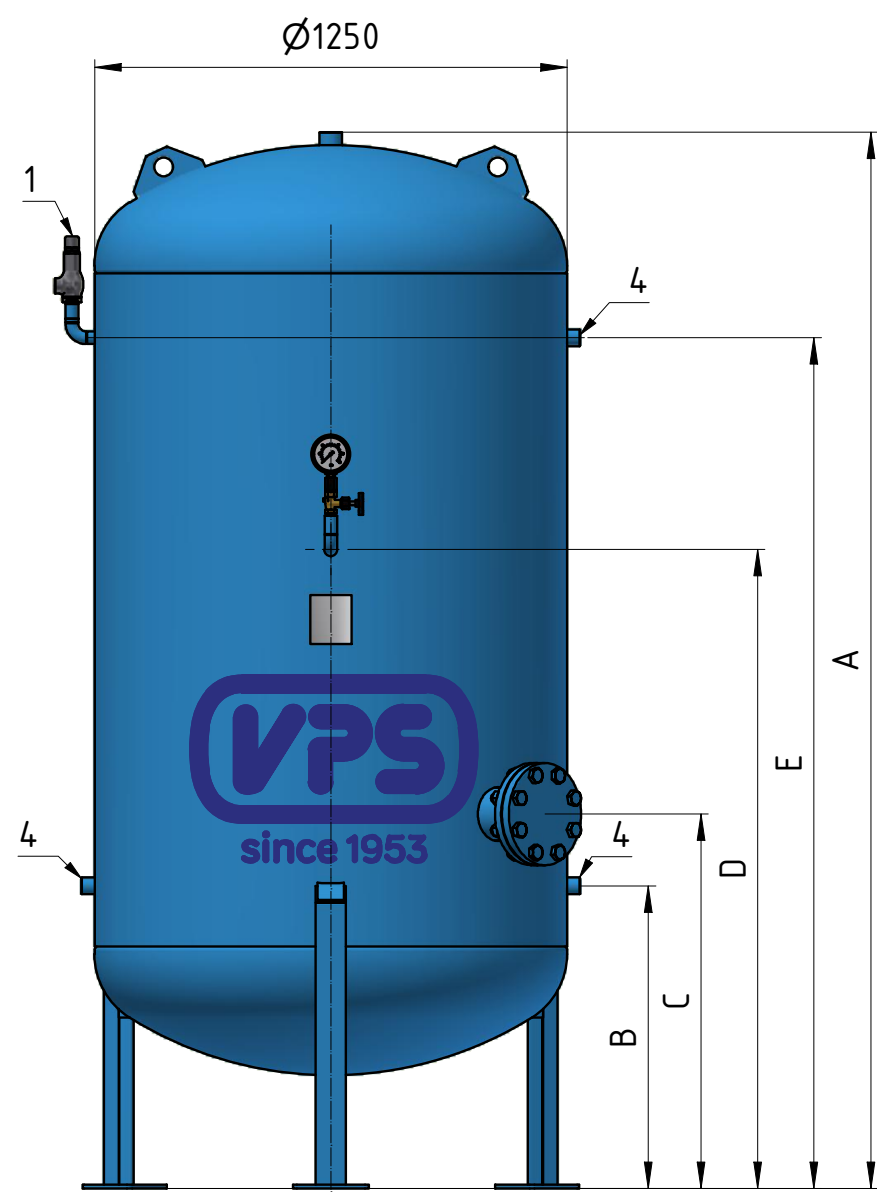



1650 l




990 l

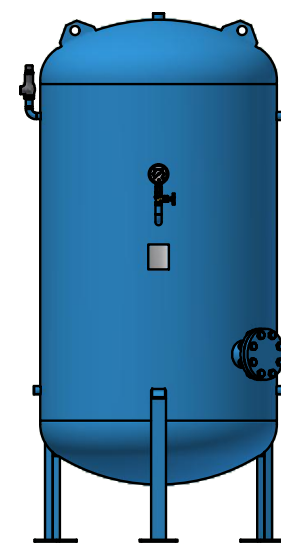


2700 l

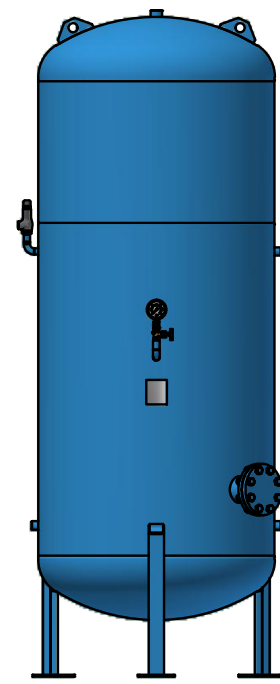


3600 l

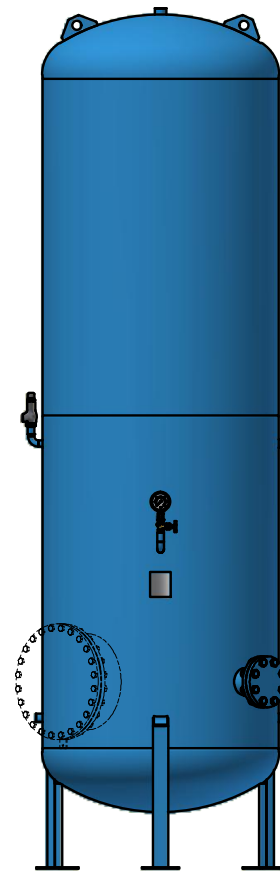

4850 l

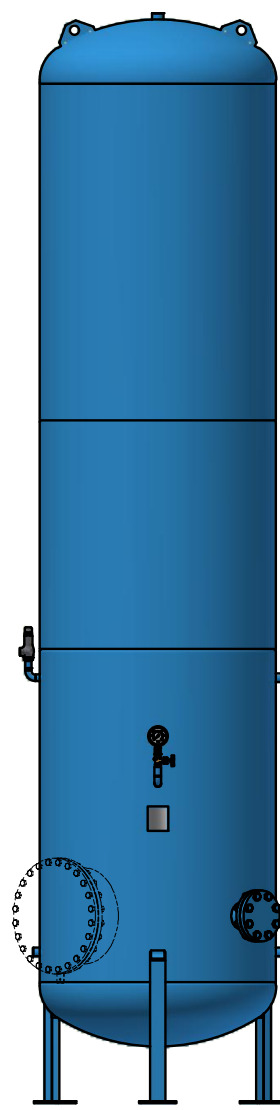

6400 l

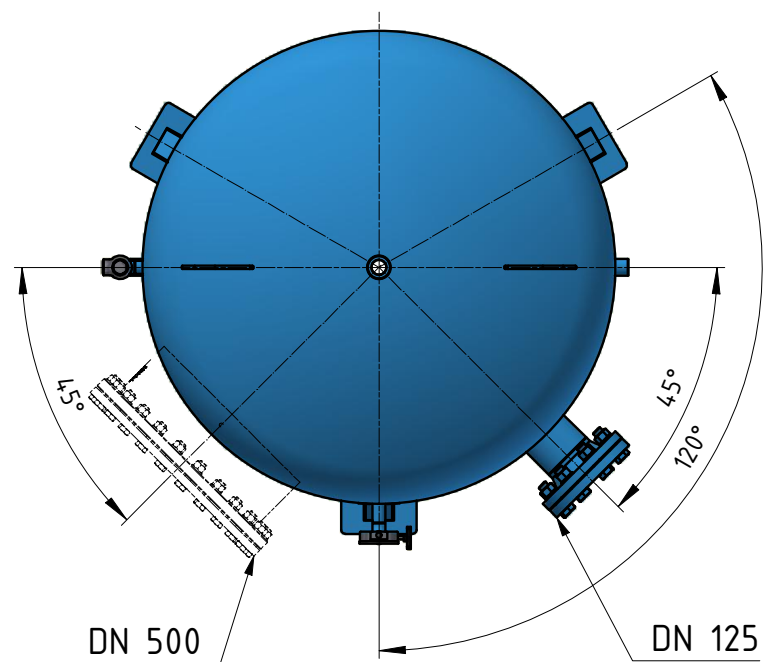

- 1 - SAFETY VALVE G 3/4"
- 2 - LEVEL GAUGE G 1/2"
- 3 - INPUT/OUTPUT G 1 1/4"
- 4 - INPUT/OUTPUT G 1"

MIN./MAX. ALLOWABLE TEMPERATURE: 0/+40°C
MAX. ALLOWABLE PRESSURE: 13,5 bar
HIGHER PRESSURES POSSIBLE ON REQUEST

CAPACITY (Ltr.)	MANTLE	LENGHT A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	WEIGHT (kg) without/with manhole
990	1	1415	740	840	940	940	270/300
1650	1	1915	800	990	1260	1400	380
2700	1	2795	800	990	1690	2250	520
3600	2	3525	800	990	1690	2250	630
4850	2	4555	800	990	1690	2250	790/910
6400	3	5765	800	990	1690	2250	990/1110

All dimension in the table are indicative only.